

RL5064

Combination Bright Field/Dark Field Illuminator

- Aii** Dual Functionality - bright field and dark field illumination in a compact housing
- Aii** Bright Field and Dark Field can be used independently



Ordering Information


Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Within Two Weeks

RL5064-660

Configured for use with Ai
Power Supply

Mounting option	Spectral wavelength	Optional power Compatibility	Alternative Connector
RL5064 X	XXX	XX	XXX
B	(UV) 395 (blue) 470 (green) 520 (yellow) 590 (orange) 625 (red) 660 (infra-red) 880 (white) WHI	IC IS C2 C3 C5 24	M12* (IS: 5-pin male; IC/24: 4-pin male)



◇ UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

IC = iCS (requires 24v power supply)

IS = ISU (24 volt PS required.)

C2 = Ai Connector

C3 = Pulsar 710 Connector


C5 = Pulsar 320 Connector

* Available with IC, IS, and 24v options only

▽ Requires a dual cable

Dimensional Information

Includes Mounting Bracket
(Part # LB108)

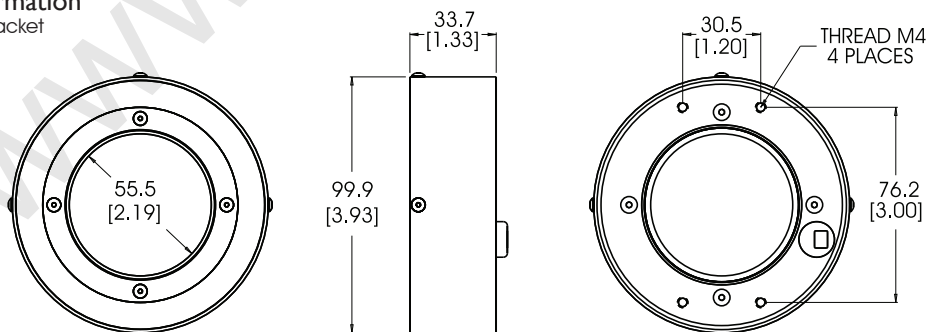

Click for Installation
Models & Drawings

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	
@24	360	360	360	360	360	360	360	mA

Standard Product Information

Finish: Black Anodized

Operating Temperature: 0-60° C

Meets Specifications: CE, RoHS

LED products provide a lifespan significantly greater than other vision lighting technologies

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com