



Distributed By: Audio Video Supply -- Tel: 1-800-284-2288 -- www.avsupply.com

SL1236 Bright Field Spot Light

Ai High intensity illumination for non-specular objects.

Ai Available in RGB "all color" version.



Ordering Information

Standard Product:
Shipped Next Day

Standard Product Variation:
Shipped Within Two Weeks


SL1236-660100L

Configured for use with Ai
Power Supply


◊ UV LEDs have a considerably shorter half-life than other LEDs (<1000hrs). For this reason Ai recommends these LEDs be used in strobe mode only. For applications requiring continuous 24v power, contact Ai for assistance.

	Spectral wavelength	Stand off	Field of view	Optional power Compatibility	Optional Light Conditioning	Alternative Connector
SL1236 -	XXX	XXX	XX	XX	X	XXX
	(UV) 395 [◊]	See chart to compute standoff.	XL	IC	D	M12*
	(blue) 470		L	IS	(Diffuser)	(IS: 5-pin male; IC/24: 4-pin male)
	(green) 520		M	C2	P	
	(yellow) 590		S	C3	(Polarizer)	
	(orange) 625		XS	C5		
	(red) 660			24		
	(infra-red) 880					
	(white) WHI					
	(all Color) RGB					

IC = iCS (requires 24v power supply)
IS = ISU (24 volt PS required.)
C2 = Ai Connector
C3 = Pulsar 710 Connector
C5 = Pulsar 320 Connector
★ Available with IC, IS, and 24v options only
! - Not available in IC, IS or C5

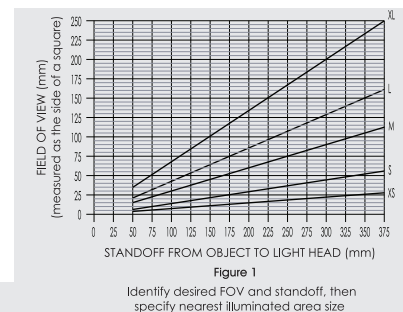

Dimensional Information

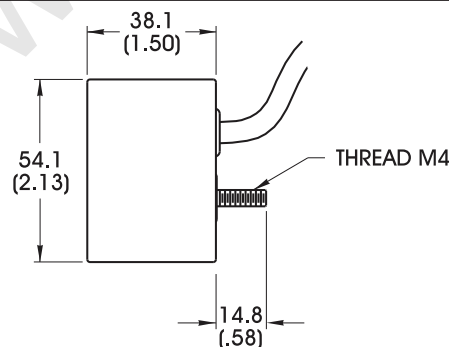

Click for Installation
Models & Drawings

Cable Length: 1.5 Meter (59") DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications

	blue	green	yellow	orange	red	infra-red	white	RGB	
@12	N/A	N/A	120	120	240	240	N/A	N/A	mA
@24	120	120	120	120	120	120	120	110	mA

Standard Product Information

Finish: Black Anodized
Operating Temperature: 0-60° C
Meets Specifications: CE, RoHS

LED products provide a lifespan significantly greater than other visible light sources.

advancedillumination.com

For design help, accessories or pricing, please contact:
sales@avsupply or call: 1-858-565-1101

AUDIOVIDEO SUPPLY
1-800-284-2288 sales@avsupply.com
www.avsupply.com